



600 °C Series


Platinum sensor with wires

For high temperatures

Benefits & Characteristics

- Excellent long-term stability
- Low self-heating
- Fast response time
- Small dimensions
- Vibration and temperature shock resistant
- Paired sensors available
- 1/5 IEC and 1/10 IEC available
- Customer-specific sensor available upon request

Illustration¹⁾

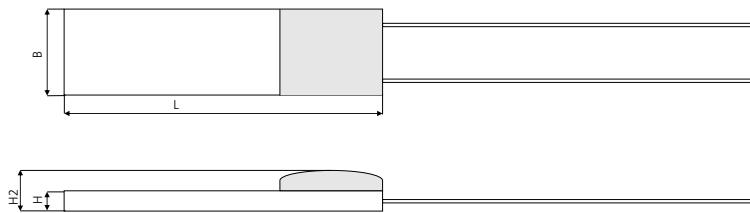

Dimension tolerances: $W \pm 0.2 \text{ mm}$, $L \pm 0.2 \text{ mm}$, $H \pm 0.1 \text{ mm}$, $H2 \pm 0.3 \text{ mm}$, $L_w \text{ (up to 30 mm)} \pm 1 \text{ mm}$

¹⁾ For actual size, see dimensions

Technical Data

Operating temperature range:	-200 °C to +600 °C	
Nominal resistance:*	100 Ω at 0 °C 500 Ω at 0 °C 1000 Ω at 0 °C 2000 Ω at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (dependent on temperature range):*	IST AG reference	
	IEC 60751 F0.15	A
	IEC 60751 F0.3	B
	IEC 60751 F0.6	C
	IEC 60751 F0.1	Y
Connection:*	Pt-cladded Ni-wire, Ø 0.2 mm (solderable, weldable, crimpable, brazeable)	
Alternative wire construction:*	Inverted wires	
Recommended applied current: ¹⁾	1 mA at 100 Ω 0.5 mA at 500 Ω	

¹⁾ Self-heating must be considered



0.3 mA at 1000 Ω

0.2 mA at 2000 Ω

Other alternatives:*
 Housed in round ceramics (for dry environments only) - see data sheet DTP_Round_Housing_E
 Grouped and paired
 Substrate thickness

* Customer-specific alternatives available

Order Information - 6W (Pt-cladded Ni-wire, Ø 0.2 mm)

Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6; 7.0	P0K1.161.6W.Y.007	P0K1.161.6W.A.007	P0K1.161.6W.B.007
Order code		101371	100945	100946
Former order code		010.02938	010.02195	010.02196
161	1.6 x 1.2 x 0.25 / 0.6; 10.0	P0K1.161.6W.Y.010	P0K1.161.6W.A.010	P0K1.161.6W.B.010
Order code		100139	100138	100137
Former order code		010.00066	010.00064	010.00062
202	1.8 x 2.0 x 0.65 / 1.1; 7.0	Upon request	P0K1.202.6W.A.007	P0K1.202.6W.B.007
Order code			100870	100871
Former order code			010.02019	010.02020
202	1.8 x 2.0 x 0.65 / 1.1; 10.0	P0K1.202.6W.Y.010	P0K1.202.6W.A.010	P0K1.202.6W.B.010
Order code		100908	100876	100877
Former order code		010.02094	010.02033	010.02034
216	2.5 x 1.6 x 0.65 / 1.3; 7.0	P0K1.216.6W.Y.007	P0K1.216.6W.A.007	P0K1.216.6W.B.007
Order code		101401	100589	100599
Former order code		010.02977	010.01111	010.01129
216	2.5 x 1.6 x 0.65 / 1.3; 10.0	P0K1.216.6W.Y.010	P0K1.216.6W.A.010	P0K1.216.6W.B.010
Order code		100429	100414	100419
Former order code		010.00652	010.00620	010.00627
232	2.2 x 2.0 x 0.65 / 1.1; 7.0	P0K1.232.6W.Y.007	P0K1.232.6W.A.007	P0K1.232.6W.B.007
Order code		100579	100767	100544
Former order code		010.01089	010.01793	010.01006
232	2.2 x 2.0 x 0.65 / 1.1; 10.0	P0K1.232.6W.Y.010	P0K1.232.6W.A.010	P0K1.232.6W.B.010
Order code		100118	100117	100116
Former order code		010.00032	010.00030	010.00029
232	2.2 x 2.0 x 0.65 / 1.1; 20.0	P0K1.232.6W.Y.020	P0K1.232.6W.A.020	P0K1.232.6W.B.020
Order code		101357	101356	100875
Former order code		010.02910	010.02909	010.02027
516	5.0 x 1.6 x 0.65 / 1.3; 7.0	Upon request	P0K1.516.6W.A.007	P0K1.516.6W.B.007
Order code			100835	100836
Former order code			010.01942	010.01943



Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
516	5.0 x 1.6 x 0.65 / 1.3; 10.0	P0K1.516.6W.Y.010	P0K1.516.6W.A.010	P0K1.516.6W.B.010
Order code		100148	100147	100146
Former order code		010.00084	010.00083	010.00082
520	5.0 x 2.0 x 0.65 / 1.3; 10.0	P0K1.520.6W.Y.010	P0K1.520.6W.A.010	P0K1.520.6W.B.010
Order code		100165	100163	100162
Former order code		010.00101	010.00099	010.00098
538	5.0 x 3.8 x 0.65 / 1.3; 10.0	Upon request	P0K1.538.6W.A.010	P0K1.538.6W.B.010
Order code			100785	100541
Former order code			010.01826	010.01001
102	10.0 x 2.0 x 0.65 / 1.3; 10.0	P0K1.102.6W.Y.010	P0K1.102.6W.A.010	P0K1.102.6W.B.010
Order code		100202	100201	100200
Former order code		010.00154	010.00153	010.00152

Nominal resistance: 500 Ω at 0 °C

161	1.6 x 1.2 x 0.25 / 0.6; 10.0	P0K5.161.6W.Y.010	P0K5.161.6W.A.010	P0K5.161.6W.B.010
Order code		100219	100218	100217
Former order code		010.00182	010.00181	010.00180
202	1.8 x 2.0 x 0.65 / 1.1; 7.0	Upon request	Upon request	P0K5.202.6W.B.007
Order code				101108
Former order code				010.02516
232	2.2 x 2.0 x 0.65 / 1.1; 10.0	P0K5.232.6W.Y.010	P0K5.232.6W.A.010	P0K5.232.6W.B.010
Order code		100223	100222	100221
Former order code		010.00187	010.00186	010.00185
516	5.0 x 1.6 x 0.65 / 1.3; 10.0	P0K5.516.6W.Y.010	P0K5.516.6W.A.010	P0K5.516.6W.B.010
Order code		100229	100228	100227
Former order code		010.00193	010.00192	010.00191
520	5.0 x 2.0 x 0.65 / 1.3; 10.0	P0K5.520.6W.Y.010	P0K5.520.6W.A.010	P0K5.520.6W.B.010
Order code		100235	100234	100233
Former order code		010.00199	010.00198	010.00197
102	10.0 x 2.0 x 0.65 / 1.3; 10.0	Upon request	P0K5.102.6W.A.010	P0K5.102.6W.B.010
Order code			100238	100237
Former order code			010.00205	010.00204

Nominal resistance: 1000 Ω at 0 °C

161	1.6 x 1.2 x 0.25 / 0.6; 10.0	P1K0.161.6W.Y.010	P1K0.161.6W.A.010	P1K0.161.6W.B.010
Order code		100247	100246	100245
Former order code		010.00222	010.00221	010.00220
202	1.8 x 2.0 x 0.65 / 1.1; 7.0	Upon request	P1K0.202.6W.A.007	P1K0.202.6W.B.007
Order code			100963	100972
Former order code			010.02232	010.02250
202	1.8 x 2.0 x 0.65 / 1.1; 10.0	Upon request	P1K0.202.6W.A.010	P1K0.202.6W.B.007
Order code			100896	100897



<i>Former order code</i>			010.02078	010.02079
216	2.5 x 1.6 x 0.65 / 1.3; 10.0	P1K0.216.6W.Y.010	P1K0.216.6W.A.010	P1K0.216.6W.B.010
Order code		101042	100588	100552
<i>Former order code</i>		010.02391	010.01109	010.01018
232	2.2 x 2.0 x 0.65 / 1.1; 7.0	P1K0.232.6W.Y.007	P1K0.232.6W.A.007	P1K0.232.6W.B.007
Order code		100545	100830	100546
<i>Former order code</i>		010.01007	010.01937	010.01008
232	2.2 x 2.0 x 0.65 / 1.1; 10.0	P1K0.232.6W.Y.010	P1K0.232.6W.A.010	P1K0.232.6W.B.010
Order code		100257	100256	100255
<i>Former order code</i>		010.00238	010.00237	010.00236
232	2.2 x 2.0 x 0.65/1.1; 20.0	Upon request	P1K0.232.6W.A.020	P1K0.232.6W.B.020
Order code			151322	100550
<i>Former order code</i>			n/a	010.01013
420	4.0 x 2.0 x 0.65 / 1.3; 7.0	Upon request	P1K0.420.6W.A.007	P1K0.420.6W.B.007
Order code			101077	101093
<i>Former order code</i>			010.02464	010.02488
420	4.0 x 2.0 x 0.65 / 1.3; 10.0	Upon request	P1K0.420.6W.A.010	P1K0.420.6W.B.010
Order code			101288	101129
<i>Former order code</i>			010.02813	010.02554
505	5.0 x 5.0 x 0.65 / 1.3; 10.0	Upon request	Upon request	P1K0.505.6W.B.010
Order code				101208
<i>Former order code</i>				010.02686
516	5.0 x 1.6 x 0.65 / 1.3; 7.0	Upon request	P1K0.516.6W.A.007	P1K0.516.6W.B.007
Order code			100828	100829
<i>Former order code</i>			010.01934	010.01935
516	5.0 x 1.6 x 0.65 / 1.3; 10.0	P1K0.516.6W.Y.010	P1K0.516.6W.A.010	P1K0.516.6W.B.010
Order code		100270	100269	100268
<i>Former order code</i>		010.00260	010.00258	010.00257
520	5.0 x 2.0 x 0.65 / 1.3; 10.0	P1K0.520.6W.Y.010	P1K0.520.6W.A.010	P1K0.520.6W.B.010
Order code		100287	100285	100284
<i>Former order code</i>		010.00282	010.00280	010.00279
538	5.0 x 3.8 x 0.65 / 1.3; 10.0	Upon request	Upon request	P1K0.538.6W.B.010
Order code				100336
<i>Former order code</i>				010.00396
102	10.0 x 2.0 x 0.65 / 1.3; 7.0	Upon request	Upon request	P1K0.102.6W.B.007
Order code				100474
<i>Former order code</i>				010.00754
102	10.0 x 2.0 x 0.65 / 1.3; 10.0	P1K0.102.6W.Y.010	P1K0.102.6W.A.010	P1K0.102.6W.B.010
Order code		100308	100473	100307
<i>Former order code</i>		010.00309	010.00753	010.00306

Nominal resistance: 2000 Ω at 0 °C

520	5.0 x 2.0 x 0.65 / 1.3; 10.0	Upon request	Upon request	P2K0.520.6W.B.010
Order code				100322
<i>Former order code</i>				010.00335



Order Information - 6W (Pt/Ni-wire, Ø 0.2 mm, 10 mm long, bent 90°), inverted wires

Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
232	2.3 x 2 x 1.1		POK1.232.6W.A.010.U.S	POK1.232.6W.B.010.U.S
Order code			101143	100975
Former order code			010.02583	010.02254

Order Information - PU (TCR = 3750 ppm/K)

Nominal resistance: 1000 Ω at 0 °C				
232	2.2 x 2.0 x 0.65 / 1.1; 10.0	Upon request	Upon request	PU1K0.232.6W.B.010
Order code				100260
Former order code				010.00244

Order Information - 7W² (Pt-wire, Ø 0.2 mm, (161) (232) (520) / Ø 0.15 mm (308))

Nominal resistance: 100 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6; 10.0	Upon request	POK1.161.7W.A.010	POK1.161.7W.B.010
Order code			100465	100446
Former order code			010.00738	010.00687
232	2.3 x 2.0 x 0.65 / 1.3; 10.0	P0K1.232.7W.Y.010	P0K1.232.7W.A.010	P0K1.232.7W.B.010
Order code		100895	100511	100341
Former order code		010.02074	010.00952	010.00402
308	3.0 x 0.8 x 0.25 / 0.6; 7.0	P0K1.308.7W.Y.007	P0K1.308.7W.A.007	P0K1.308.7W.B.007
Order code		100561	100537	100538
Former order code		010.01037	010.00996	010.00997
520	5.0 x 2.0 x 0.65 / 1.3; 10.0	Upon request	P0K1.520.7W.A.010	P0K1.520.7W.B.010
Order code				100170
Former order code			010.00107	010.00106

Nominal resistance: 1000 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6; 7.0	Upon request	P1K0.161.7W.A.007	P1K0.161.7W.B.007
Order code			101114	101115
Former order code			010.02530	010.02531
161	1.6 x 1.2 x 0.25 / 0.6; 10.0	Upon request	P1K0.161.7W.A.010	P1K0.161.7W.B.010
Order code			100757	100759
Former order code			010.01760	010.01766
232	2.3 x 2.0 x 0.65 / 1.3; 10.0	Upon request	P1K0.232.7W.A.010	P1K0.232.7W.B.010
Order code			100766	100258
Former order code			010.01791	010.00239



Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
308	3.0 x 0.8 x 0.25 / 0.6; 7.0	P1K0.308.7W.Y.007	P1K0.308.7W.A.007	P1K0.308.7W.B.007
Order code		100725	100514	100432
Former order code		010.01681	010.00955	010.00656

²⁾ Operating temperature range of -200 °C to +600 °C

Order Information - 6W (Pt-cladded Ni-wire, Ø 0.2 mm), D (substrate thickness, 0.4 mm)

Nominal resistance: 100 Ω at 0 °C

232	2.3 x 2.0 x 0.4 / 1.05; 10.0	Upon request	P0K1.232.6W.A.010.D	P0K1.232.6W.B.010.D
Order code			100463	100462
Former order code			010.00731	010.00730
516	5.0 x 1.6 x 0.4 / 1.05; 10.0	Upon request	P0K1.516.6W.A.010.D	P0K1.516.6W.B.010.D
Order code			100334	100333
Former order code			010.00394	010.00393
520	5.0 x 2.0 x 0.4 / 1.05; 10.0	Upon request	P0K1.520.6W.A.010.D	P0K1.520.6W.B.010.D
Order code			100169	100167
Former order code			010.00105	010.00103
102	10.0 x 2.0 x 0.4 / 1.05; 10.0	Upon request	P0K1.102.6W.A.010.D	P0K1.102.6W.B.010.D
Order code			100855	100337
Former order code			010.01992	010.00397

Nominal resistance: 1000 Ω at 0 °C

516	5.0 x 1.6 x 0.4 / 1.05; 10.0	P1K0.516.6W.Y.010.D	P1K0.516.6W.A.010.D	P1K0.516.6W.B.010.D
Order code		100340	100442	100339
Former order code		010.00401	010.00675	010.00400
102	10.0 x 2.0 x 0.4 / 1.05; 10.0	Upon request	P1K0.102.6W.A.010.D	P1K0.102.6W.B.010.D
Order code			100310	100309
Former order code			010.00313	010.00311

Order Information - 7W³⁾ (Pt-wire, Ø 0.2 mm), D (substrate thickness, 0.4 mm)

Nominal resistance: 200 Ω at 0 °C

516	5.0 x 1.6 x 0.4 / 1.05; 7.0	Upon request	P0K2.516.7W.A.007.D	P0K2.516.7W.B.007.D
Order code			150635	100880
Former order code			010.02023	010.02039

³⁾ Operating temperature range of -200 °C to +600 °C



Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
------	------------------------------------------------------	----------------	-----------------	----------------

Order Information - 7W⁴⁾ (Pt-wire, Ø 0.15 mm)

Size	Dimensions (L x W x H / H2; L _w in mm)	1/10 F0.3 (class K) ⁵⁾
------	------------------------------------------------------	-----------------------------------

Nominal resistance: 100 Ω at 0 °C

308	3.0 x 0.8 x 0.25 / 0.6; 7.0	POK1.308.7W.K.007
Order code		100969
Former order code		010.02243

⁴⁾ Operating temperature range of -200 °C to +600 °C

⁵⁾ 1/10 IEC 60751 in the range of +15 °C to +35 °C

Order Information - 6W (Pt-cladded Ni-wire, Ø 0.2 mm), T (substrate thickness, 0.25 mm)

Nominal resistance: 100 Ω at 0 °C

232	2.3 x 2.0 x 0.25 / 0.9; 10.0	P0K1.232.6W.Y.010.T	P0K1.232.6W.A.010.T	P0K1.232.6W.B.010.T
Order code		100121	100120	100119
Former order code		010.00035	010.00034	010.00033
516	5.0 x 1.6 x 0.25 / 0.9; 10.0	Upon request	P0K1.516.6W.A.010.T	P0K1.516.6W.B.010.T
Order code			100150	100149
Former order code			010.00086	010.00085
520	5.0 x 2.0 x 0.4 / 1.05; 10.0	Upon request	Upon request	P0K1.520.6W.B.010.T
Order code				100166
Former order code				010.00102

Nominal resistance: 1000 Ω at 0 °C

232	2.3 x 2.0 x 0.25 / 0.9; 7.0	Upon request	P1K0.232.6W.A.007.T	P1K0.232.6W.B.007.T
Former order code			010.03211	010.03204

Additional Documents

Application Note:	Document name: ATP_E
-------------------	-------------------------



Order Information

Platinum Sensor

Secondary reference

Material

P = Platinum

TCR

= Pt 3850 ppm/K G = Pt 3911 ppm/K
 U = Pt 3750 ppm/K W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0 °C

Size in mm

Operating temperature range

1 = -50 °C to +150 °C 6 = -200 °C to +600 °C
 2 = -50 °C to +200 °C 7 = -200 °C to +750 °C
 3 = -200 °C to +300 °C 8 = -200 °C to +850 °C
 4 = -200 °C to +400 °C 10 = -70 °C to +1000 °C

Connection

S = SIL FK = flat wire customer-specific
 I = insulated wire SW = perpendicular wire
 K = customer-specific L = insulate stranded wire
 W = wire E = enameled Cu-wire
 FW = flat wire

Tolerance class

A = IEC 60751 F0.15 K = customer-specific
 B = IEC 60751 F0.3 P = pair
 C = IEC 60751 F0.6 G = group
 Y = IEC 60751 F0.1

Wire length in mm

Special

T = substrate thickness 0.25 mm M = metallized backside
 D = substrate thickness 0.38 mm U = inverted welding
 R = round housing S = special
 W = sintered powder

P OK1. 520. 6 W. A. 007. D



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
 Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved