


(1:2)

shaft connection

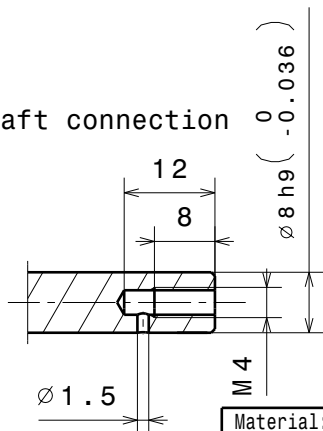

Ra 1.6 (✓)

general tolerances ISO 2768-K

+0.2
+0.1

-0.1
-0.2

Material: all UHV compatible		nominal	over	1	6	30	100	300	1000
Linear/Rotary feedthrough DN40CF with single sided tube support		dimension up to		6	30	100	300	1000	2000
Retracted Length = 0mm		tolerance ±		0.05	0.1	0.3	0.5	0.8	1.2
Scale		Drawn	U. Maier						
1:1		Date	08.11.2013						
(1:2) (2:1)		changed	07.09.18 CW						
Ferrovac GmbH		MD40 (Y0) - TSM DH							
CH-8050 Zurich									
REV	B	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC GMBH. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.							