


A-A (2:1)

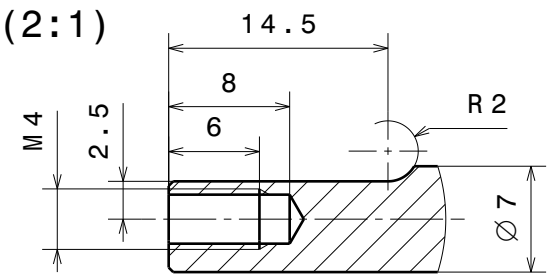

$\sqrt{\text{Ra } 1.6}$  (✓)
 

↙	+0.2	-0.1
↘	+0.1	-0.2

Allgemeintoleranzen ISO 2768-K

Material: fully UHV compatible materials	Nennmass	über	1	6	30	100	300	1000
Single Shaft Wobblestick	bis		6	30	100	300	1000	2000
	Toleranz	±	0.05	0.1	0.3	0.5	0.8	1.2
DN40CF	Masstab	gezeichnet	Denys Sutter					
<b>Ferrovac GmbH</b> CH-8050 Zürich	1:2	Datum	03.02.2010					
		geändert	15.11.18 CW					
			<b>WM40</b>					